
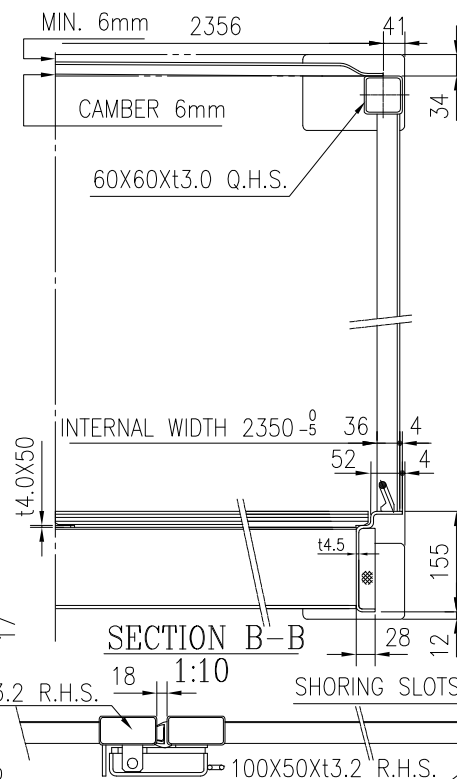
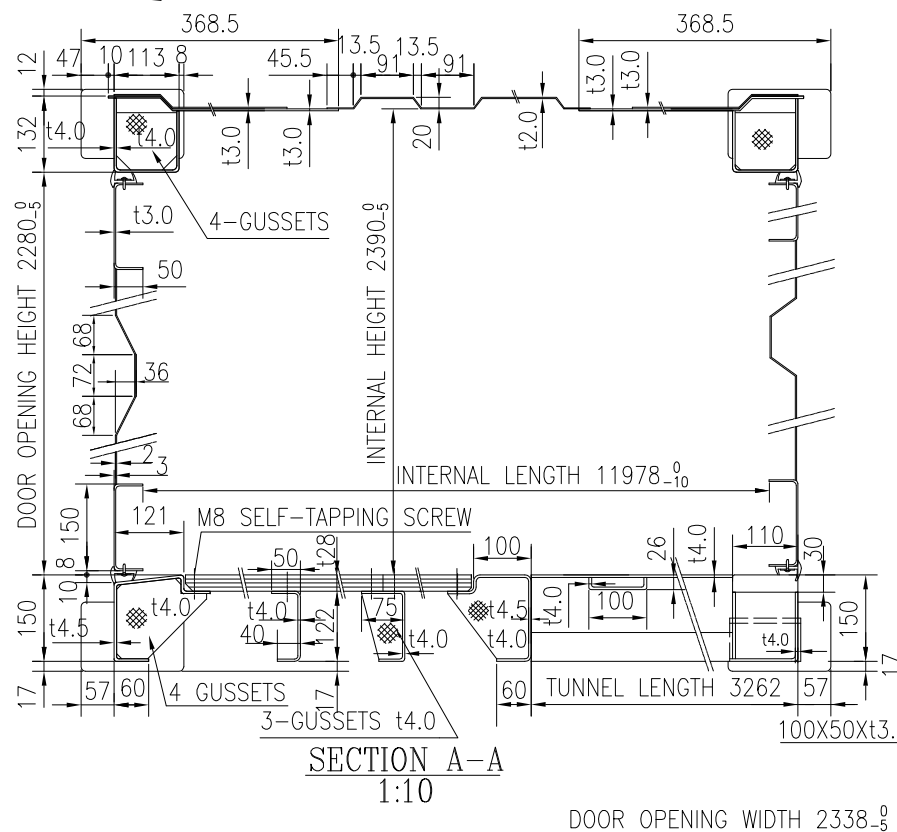


SECTION D-D  
1:5

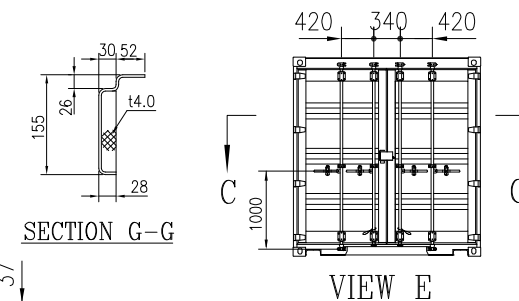

|                              |        |           |                          |                         |                    |
|------------------------------|--------|-----------|--------------------------|-------------------------|--------------------|
| EXTERNAL                     | LENGTH | 12,192    | $\frac{0}{-10\text{mm}}$ | 40' 0 "                 | $\frac{0}{-3/8"}$  |
|                              | WIDTH  | 2,438     | $\frac{0}{-5\text{mm}}$  | 8' 0 "                  | $\frac{0}{-3/16"}$ |
|                              | HEIGHT | 2,591     | $\frac{0}{-5\text{mm}}$  | 8' 6 "                  | $\frac{0}{-3/16"}$ |
| INTERNAL                     | LENGTH | 11,978    | $\frac{0}{-10\text{mm}}$ | 39' 3 $\frac{33}{64}$ " | $\frac{0}{-3/16"}$ |
|                              | WIDTH  | 2,350     | $\frac{0}{-5\text{mm}}$  | 7' 8 $\frac{33}{64}$ "  | $\frac{0}{-3/16"}$ |
|                              | HEIGHT | 2,390     | $\frac{0}{-5\text{mm}}$  | 7' 10 $\frac{12}{64}$ " | $\frac{0}{-3/16"}$ |
| DOOR OPENING                 | WIDTH  | 2,338     | $\frac{0}{-5\text{mm}}$  | 7' 8 $\frac{33}{64}$ "  | $\frac{0}{-3/16"}$ |
|                              | HEIGHT | 2,280     | $\frac{0}{-5\text{mm}}$  | 7' 5 $\frac{33}{64}$ "  | $\frac{0}{-3/16"}$ |
| INTERNAL CUBIC CAPACITY      |        | 67.3      | CU.m                     | 2,380                   | CU.ft              |
| MAXIMUM GROSS WEIGHT         |        | 30,480    | kg                       | 67,200                  | lb                 |
| TARE WEIGHT                  |        | 3,725     | kg                       | 8,210                   | lb                 |
| MAXIMUM PAYLOAD              |        | 26,755    | kg                       | 58,990                  | lb                 |
| STACKING TEST LOAD(PER POST) |        | 96,012    | kg                       | 211,670                 | lb                 |
| FLOOR STRENGTH LOAD          |        | 5,460     | kg                       | 12,040                  | lb                 |
| CLASSIFICATION               |        | DIMENSION |                          |                         |                    |

|                         |                |                    |
|-------------------------|----------------|--------------------|
| CX18-4212/1-500         | FRONT ASSEMBLY |                    |
| CX18-4212/1-400         | SIDE ASSEMBLY  | R/H:1 L/H:1        |
| CX14-42FBX-300          | ROOF ASSEMBLY  |                    |
| CX18-4212/1-200         | DOOR ASSEMBLY  |                    |
| CX18-4312-100           | BASE ASSEMBLY  |                    |
| DRAWING NO.             | DESCRIPTION    | REMARK             |
|                         |                |                    |
|                         |                |                    |
|                         |                |                    |
|                         |                |                    |
| MARK                    | QTY            | FILE NO. NAME DATE |
| DESIGNED                |                | Cui HL             |
| CHECKED                 |                | ZOU JJ             |
| APPROVED                |                | ZHANG JL           |
| 总装图<br>GENERAL ASSEMBLY |                | CX18-4212X-000     |
| 2022.09.15              |                | CXC CO.,LTD.       |